

All to brighten the world

FURUKAWA
ELECTRIC

Low Temperature Superconductors

Contribution to Advanced
Science & Technology




Furukawa Electric is the pioneer
in superconductivity

Comprehensiveness from low-temperature
superconductivity to high-temperature
superconductivity

Discovering
the Higgs boson!

Furukawa Electric's superconductive
technology aids the experiment

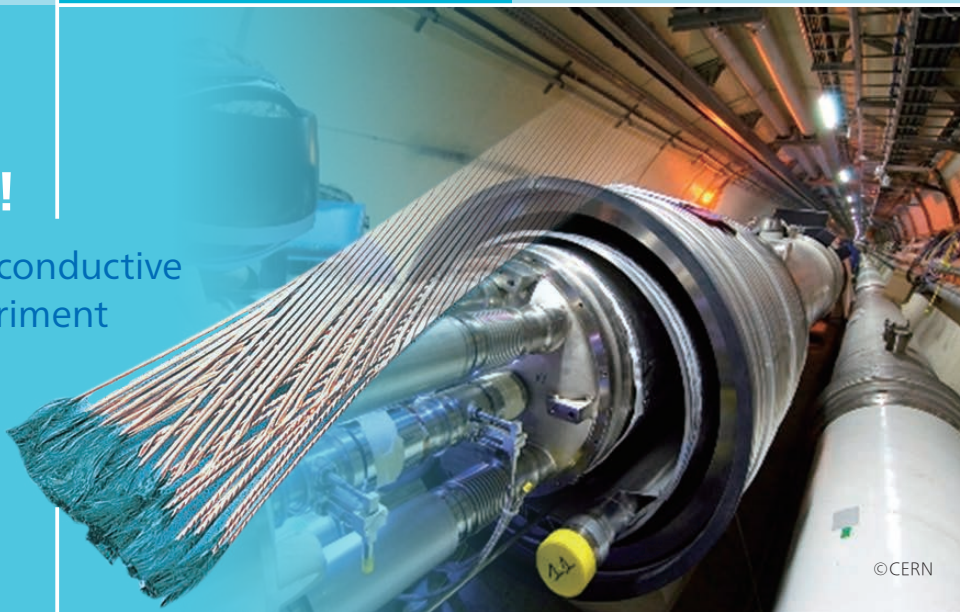

1 Factory




In 1963, Furukawa Electric Co, Ltd. (FEC) became the world's first company to commence research and development work on superconductivity.

Based on our manufacturing technologies for electrical wires and non-ferrous metals, commercial production of NbTi multifilamentary wire began in late 1960s in Nikko works. We have been providing unique products for more than 50 years and our products are being applied to a broad range of areas, such as MRI, NMR, experimental nuclear fusion reactor and accelerators for high energy physics.




2 Global Network

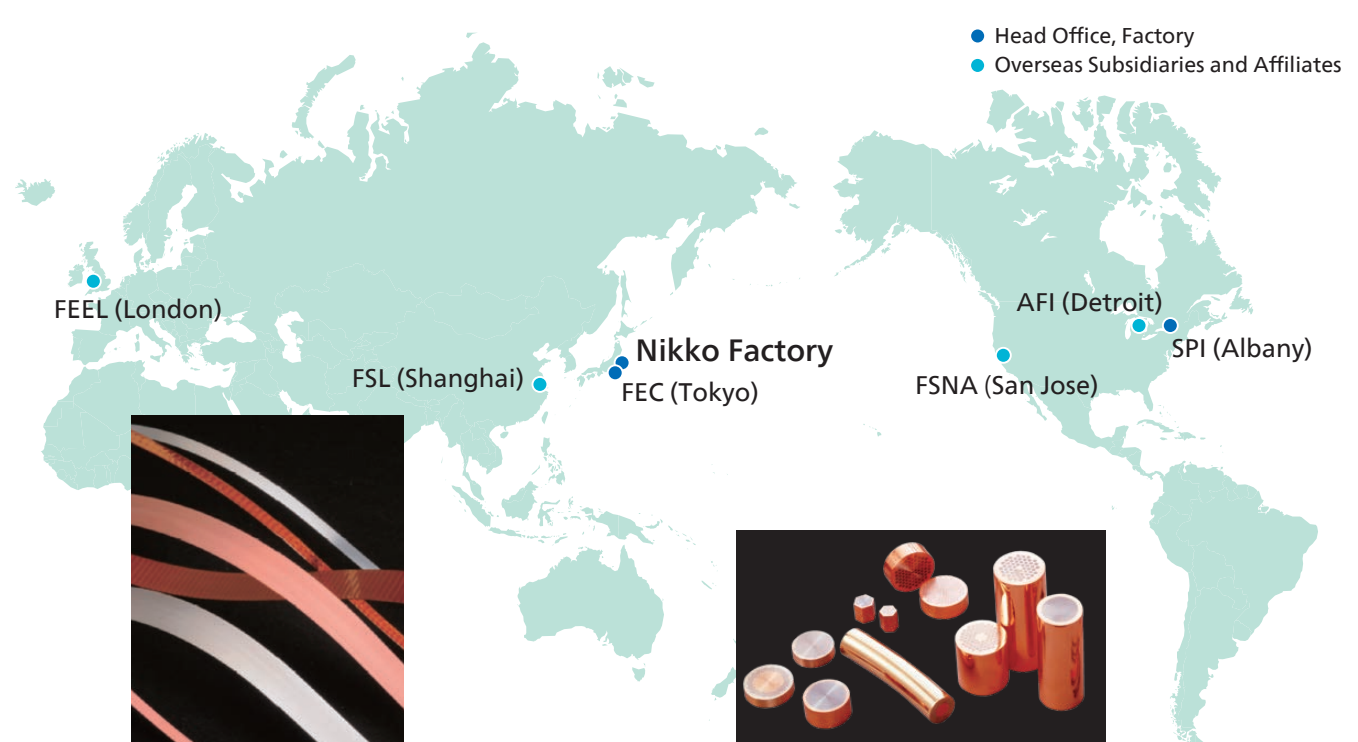


3 Manufacturing Technology

3.1 Fine Filament & Long Length

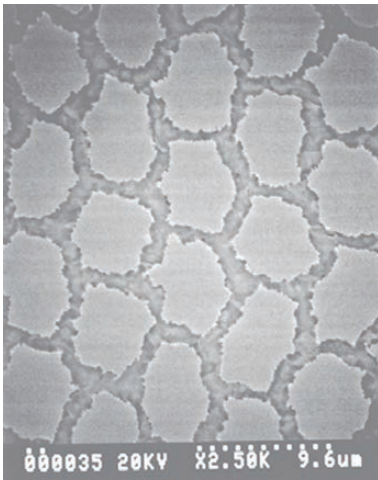


NbTi Filaments

Our excellent manufacturing processes enable FEC to produce long NbTi and Nb₃Sn superconducting wires with thousands of several μm diameter filaments. Key processes are billet assembling without inclusions, high power hot extrusion for large size billets and 75m long drawing bench for long length. Clean factory, optimized drawing conditions and adequate shaving thickness of surface Cu prevents filament breakage, filament sausageing and wire breakage.

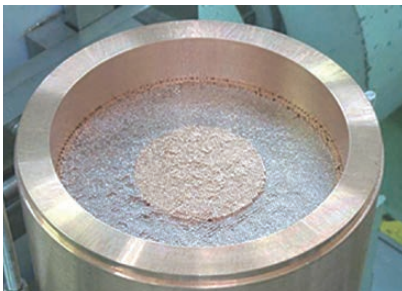

Billet Assembling

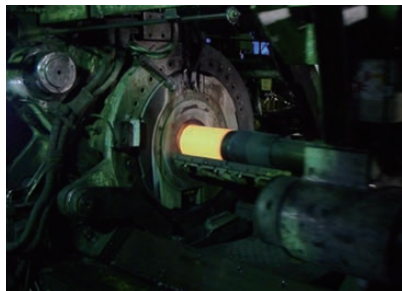

Hot Extrusion



75m Long Drawing Bench

3.2 Cabling




Rutherford Cable



Multiplex Cable

FEC manufactures precisely dimension controlled Rutherford type cable without sharp edges and multiplex cables with round shape, and stainless steel tape wrapping for CIC conductor.


3.3 Insulation

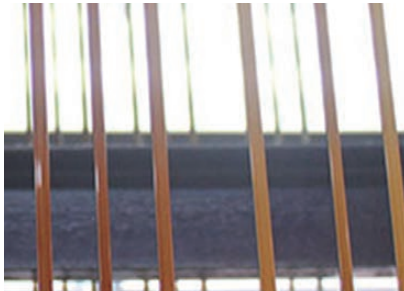

Polyvinyl Formal



Glass Braiding

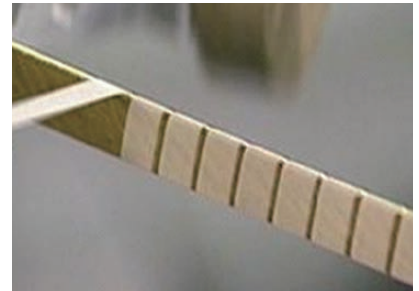

Taping

FEC can supply several types of insulations: Polyvinyl Formal for round and rectangular NbTi wires, glass braiding for round and rectangular Nb₃Sn wires and polyimide tape or glass tape for NbTi cables.

3.4 Quality Assurance




FEC has excellent quality products: Specific properties of the wires and cables are checked using its own testing equipment, which is properly checked for accurate measurement - I_c measurement up to 17T, AC loss measurement, dimension measurement with laser micrometers and eddy current test for whole length quality assurance.

Automotive Products & Electronics Laboratories in Nikko works supports the development of new conductors and solving manufacturing problems, such as wire breakages, with its high investing and analysis ability.


FEC continues to support the success of our customers by supplying high-quality products.

4 Products & Properties

4.1 Multi-Filamentary Superconductors


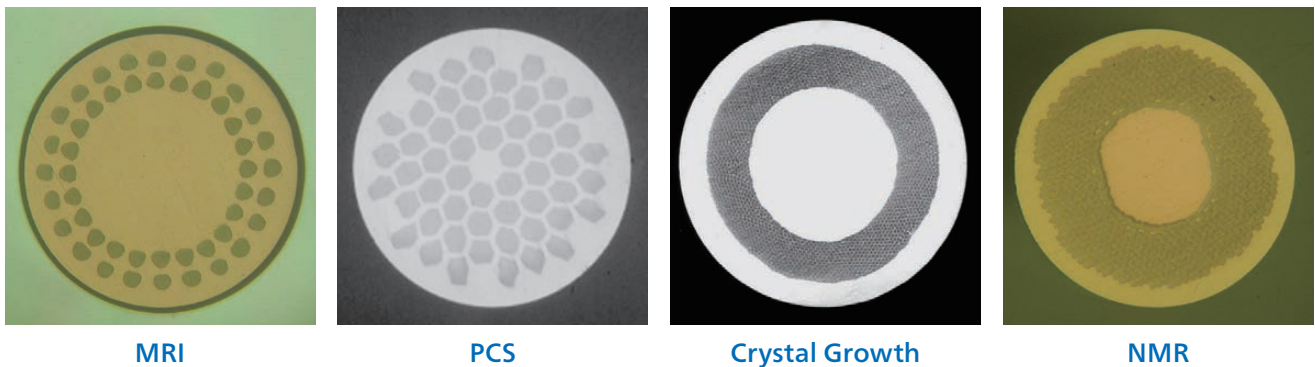


4.2 Low AC Loss NbTi Superconductors

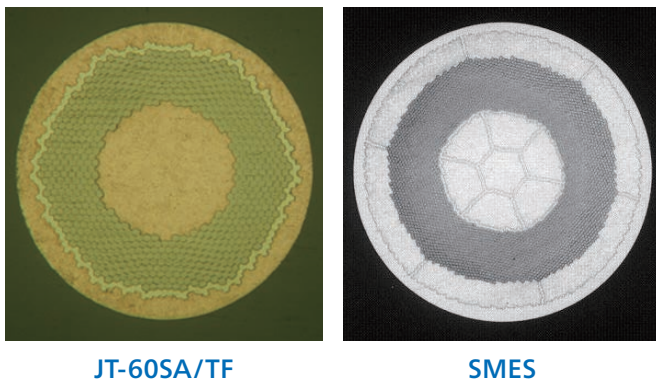

FEC has extensive experience in developing low AC loss NbTi wires: Applications include generator, nuclear fusion reactor and SMES. SMES for load fluctuation compensation and frequency control was developed using FEC's conductor and successfully demonstrated a verification test for glid linkage at FEC's power plant in Nikko.

4.3 High J_c & Low AC Loss Nb_3Sn Superconductor

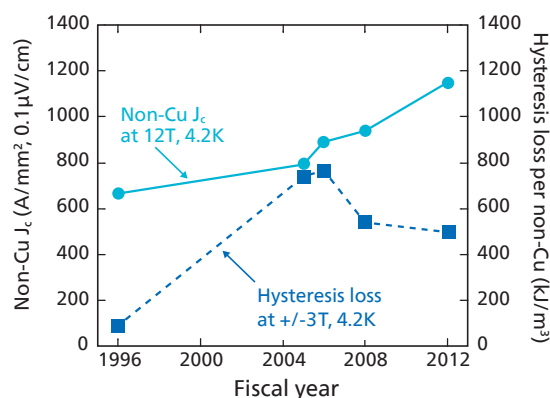


Improvement of Non-Cu J_c

Non-Cu J_c of Nb_3Sn wire (bronze processed) increased remarkably from 650A/mm² to 1,200A/mm² at 12T, 4.2K through R&D for ITER.


High Sn content bronze, round shape fine filament and adequate heat treatment for Nb_3Sn formation are important factors for this improvement.

Hysteresis losses were decreased due to filament diameter reduction and adopting Ta instead of Nb for the barrier between outer Cu and bronze preventing Sn diffusion.


4.4 High Strength Nb₃Sn Superconductors



CuNi-NbTi Reinforced



Cu-Nb Rod Reinforced

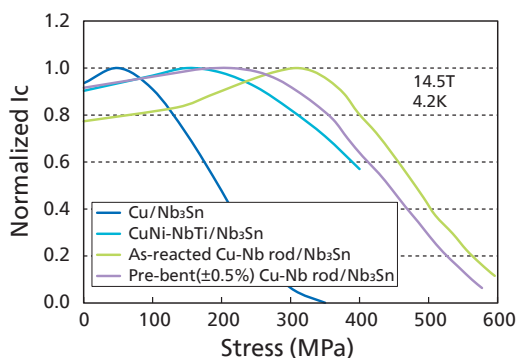


Normalized Ic vs. Stress

Two types of high strength Nb₃Sn wires (bronze processed) have been developed:


- CuNi-NbTi reinforced wire excels in price and quality and is being applied to high field magnets.
- Cu-Nb rod reinforced wire can be used for react & wind method due to its relatively high tolerance for mechanical strain.

FEC supplies cables composed of both these wires.


4.5 React and Wind Nb₃Sn superconductors




High-Jc

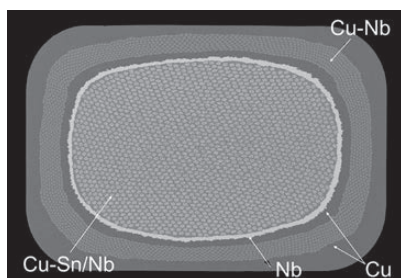

Rectangle



25T-CSM


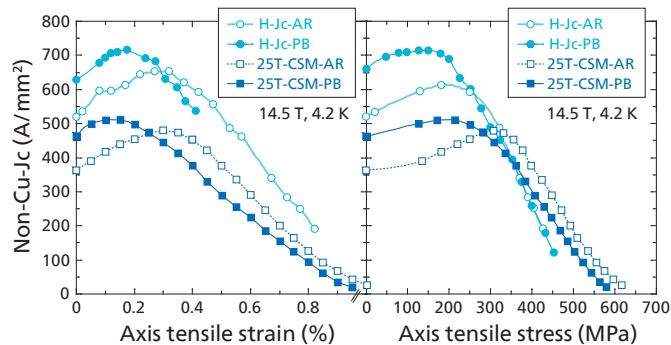


FEC has developed react & wind Nb₃Sn superconducting wire.

FEC can supply various shapes of this wire such as rectangle and Rutherford cable.


This wire has already been used for 25T-CSM in Tohoku university and some magnets in Japan manufacturer.

This wire can be insulated by Polyvinyl Formal.




Polyvinyl Formal insulation


4.6 High Current Superconductors




LHC




JT-60SA/EF



JT-60SA/CS




ITER/CS



High Field Magnet

5 Large Scale Production

5.1 LHC (CERN)

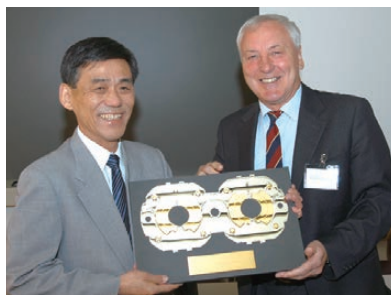

FEC manufactures 180 tons of strands and 360 tons of Rutherford type cables for LHC dipole and has received the Golden Hadron Award from CERN for the uniformly high quality of its products and the earliest delivery in the world.

5.2 JT-60SA (JAEA & F4E)

JT-60 of Japan Atomic Energy Agency (JAEA) is being upgraded to JT-60SA through Broader Approach Program: Multiplex cabling technology for long length without strand breakage was successfully established. FEC supplied on schedule 52 tons of NbTi conductors for EF coil, 21 tons of Nb₃Sn conductors for CS coil and 43 tons of NbTi strands for TF coil.

5.3 ITER (JAEA & IO)

FEC develops high-performance CS conductor with the world's highest current shearing temperature (T_cs) by the world's highest critical current density of bronze method Nb₃Sn strand and special short-pitch cable, and is manufacturing 60 tons of ITER-CS cables for two modules.



<https://www.furukawaelectric.com/en/>



Head Office

Tokiwabashi Tower, 2-6-4, Otemachi, Chiyodaku, Tokyo,
100-8322, Japan
TEL. +81-3-6281-8500

Contact: <https://www.furukawaelectric.com/en/rd/superconduct/>

FURUKAWA ELECTRIC EUROPE LTD. (FEEL)

Colet Court, 100 Hammersmith Rd, London W6 7JP
TEL: +44 (0) 20 7313 5300 FAX: +44 (0) 20 7313 5310
Contact: <http://www.furukawa.co.uk/contactus.php>

AMERICAN FURUKAWA, INC. (AFI)

47677 Galleon Drive, Plymouth, MI 48170, U.S.A.
TEL: +1-734-395-2230 FAX: +1-734-446-2260
Contact: Info4@americanfurukawa.com

FURUKAWA SANGYO NORTH AMERICA, INC. (FSNA)

1871 The Alameda, Suite 350, San Jose, CA 95126, U.S.A.
TEL: +1-408-496-0051 FAX: +1-408-496-0052
Contact: FSNA_Sales@furusan-na.com

FURUKAWA SHANGHAI, LTD. (FSL)

Room 1006, Hongyi Plaza, 288 Jujiang Rd,
Shanghai 200001, China
TEL: +86-21-3366-5304 FAX: +86-21-3366-5315
Contact: fsl.inquiry@furukawaelectric.com

* Please understand that contents of this catalog may change without notice.

* Company and product names appearing in this publication are registered trademarks or trademarks of respective companies.

Export Control Regulations

The products and/or technical information presented in this publication may be subject to the application of the Foreign Exchange and Foreign Trade Act and other related laws and regulations in Japan. In addition, the Export Administration Regulations (EAR) of the United States may be applicable. In cases where exporting or reexporting the products and/or technical information presented in this publication, customers are requested to follow the necessary procedures at their own responsibility and cost. Please contact the Ministry of Economy, Trade and Industry of Japan or the Department of Commerce of the United States for details about procedures.