


### IPsec中継: IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加  
暗号化の条件: AES-256/SHA-1

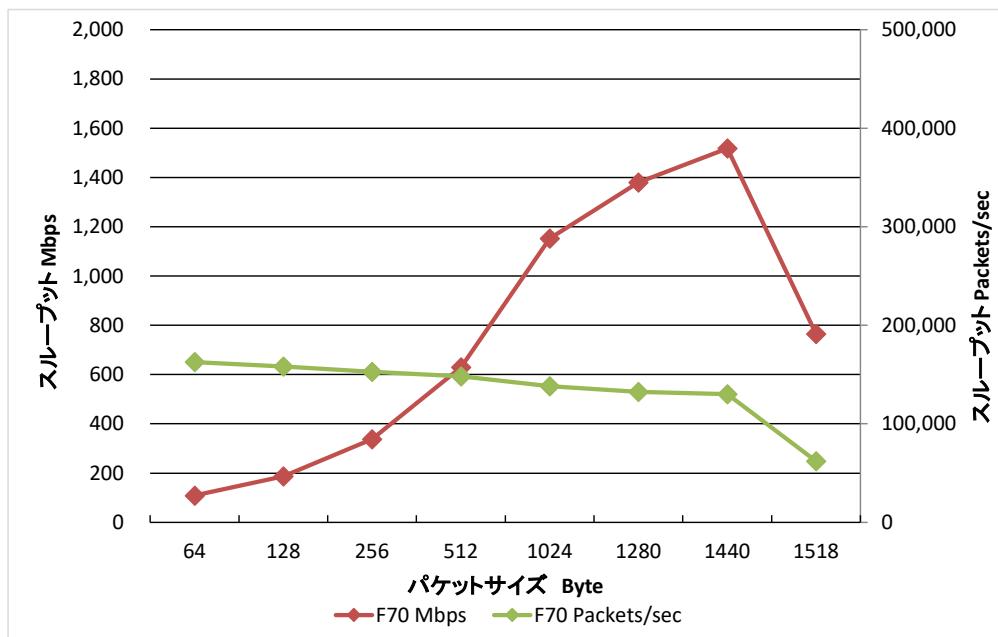


	測定フレームサイズ(bytes) ※最小値:64bytes、フラグメント前の最大値:1440bytes							
	64	128	256	512	1024	1280	1440	1518
Packets/sec	162,670.4	158,244.4	152,899.4	148,091.6	138,073.8	132,647.0	129,971.0	62,167.6
Mbps	109.3	187.4	337.6	630.3	1,153.2	1,379.5	1,518.1	764.9

## EtherIP over IPsec中継: Ethernet over IPv4 over IPv6

回線速度: 1Gbps、双方向フロー印加

暗号化の条件: AES-256/SHA-1

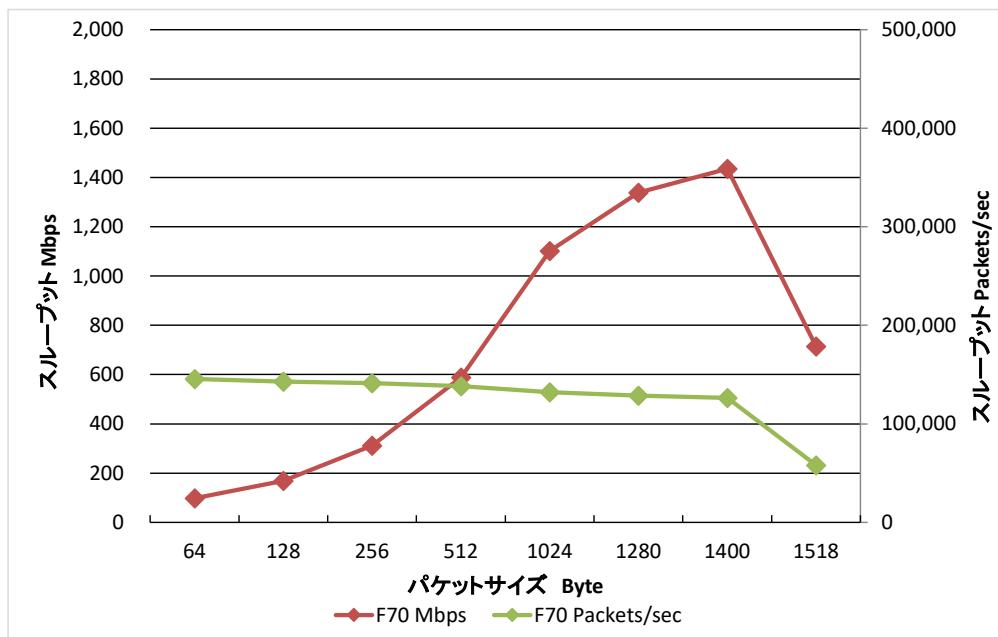


	測定フレームサイズ(bytes) ※最小値:64bytes、フラグメント前の最大値:1400bytes							
	64	128	256	512	1024	1280	1400	1518
Packets/sec	145,576.2	142,743.0	141,182.6	138,298.4	131,984.0	128,722.4	126,355.0	58,052.8
Mbps	97.8	169.0	311.7	588.6	1,102.3	1,338.7	1,435.4	714.3

## L2TPv3 over IPsec中継:Ethernet over IPv4 over IPv6

回線速度:1Gbps、双方向フロー印加

暗号化の条件: AES-256/SHA-1

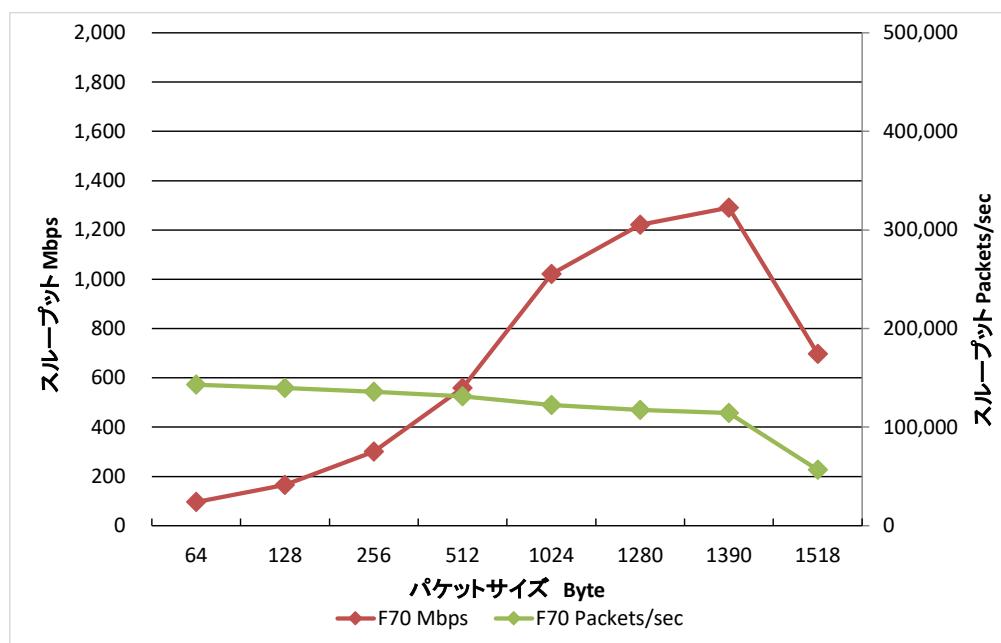

	測定フレームサイズ(bytes) ※最小値:64bytes、フラグメント前の最大値:1390bytes							
	64	128	256	512	1024	1280	1390	1518
Packets/sec	143,058.6	139,885.0	135,928.2	131,455.2	122,289.4	117,369.4	114,416.2	56,687.6
Mbps	96.1	165.6	300.1	559.5	1,021.4	1,220.6	1,290.6	697.5